


TIWINOK 品牌 12 系列高扭矩直线导轨 (俗称 KG) 法兰螺孔型滑块尺寸表

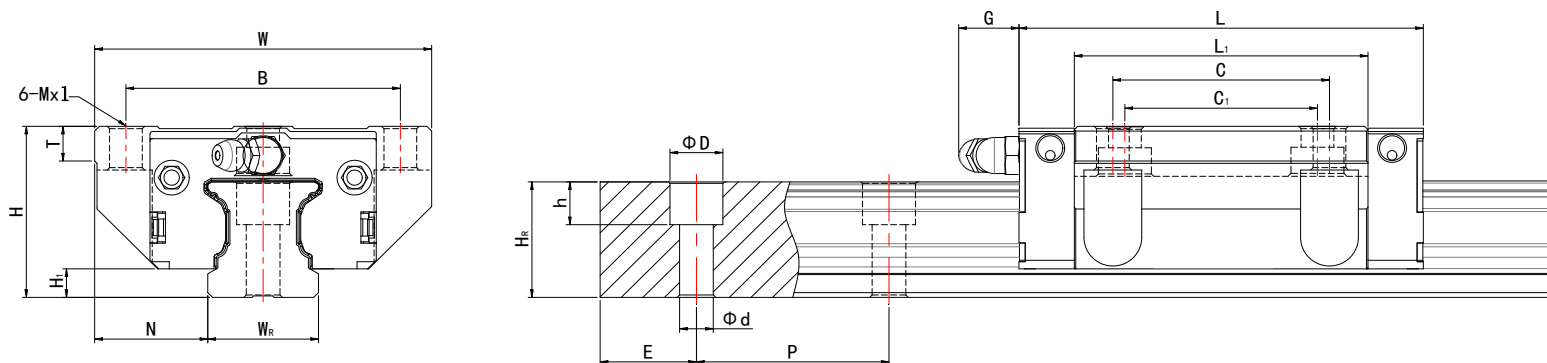

系列规格	滑块型号代码	组件尺寸 (mm)			滑块尺寸 (mm)								导轨尺寸 (mm)						基本动额定负荷 C (N)	基本静额定负荷 Co (N)			
		H	H1	N	W	B	B1	C	C1	L1	L	G	M	T	WR	HR ₁	HR ₂	D			h	d	p
KG15	12511	24	4.3	16	47	38	4.5	30	26	39.2	58.2	5.3	M5	6	15	16.2	16.4	7.5	5.3	4.5	60	13800	18020
	12531									53.6	72.6											17600	25530
KG20	12518	30	4.6	21.5	63	53	5	40	35	52.5	74.9	12	M6	6.5	20	20.6	20.8	9.5	8.5	6	60	23700	30510
	12538									68.5	90.5											28600	39900
KG25	12512	36	6.1	23.5	70	57	6.5	45	40	61	84	12	M8	7	23	24.3	24.5	11	9	7	60	34960	43940
	12532									78.6	104.6											42180	57460
KG30	12517	42	7	31	90	72	9	52	44	69	96.9	12	M10	10.5	28	28.4	28.7	14	12.4	9	80	46000	55190
	12537									92.3	118.9											58590	78180
KG35	12513	48	7.6	33	100	82	9	62	52	79	111.4	12	M10	10	34	32	32.3	14	12	9	80	61170	79300
	12533									105	137.4											77900	112340
KG45	12514	60	9.7	37.5	120	100	10	80	60	97.8	137.8	12.9	M12	15	45	39.9	40.2	20	17	14	105	97630	133000
	12534									132.3	172.3											124430	217200

注：1. HR₁ 为不加密封带板的高度尺寸，HR₂ 为加密封带板的高度尺寸。